



MASTER PL-C 2 Pin

MASTER PL-C 10W/840/2P 1CT/5X10BOX

Energy-saving compact fluorescent lamps Compact long-arc low-pressure mercury discharge lamp Envelope consists of 4 parallel narrow fluorescent tubes

Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	G24D-1 [G24d-1]
Life to 10% failures (nom.)	6500 h
Life to 50% failures (nom.)	10000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	98 %
LSF 6000 h Rated	92 %
LSF 8000 h Rated	78 %

Light Technical	
Colour Code	840 [CCT of 4,000 K]
Lamp Luminous Flux 25°C EL (Nom)	600 lm
Lamp Luminous Flux (Nom)	600 lm
Colour Designation	Cool White (CW)
Colour Temperature, horizontal (Nom)	4000 K
Lamp Luminous Efficacy EM (Nom)	60 lm/W

Colour Rendering Index,horiz (Nom)	82
LLMF 2000 h Rated	92 %
LLMF 4000 h Rated	87 %
LLMF 6000 h Rated	83 %
LLMF 8000 h Rated	81 %

Operating and Electrical	
Power (Rated) (Nom)	10.0 W
Lamp current (nom.)	0.190 A

Temperature	
Design temperature (nom.)	28 °C


Controls and Dimming	
Dimmable	No

MASTER PL-C 2 Pin

Mechanical and Housing	
Cap-base information	2P
Approval and Application	
Mercury (Hg) content (nom.)	1.4 mg
Energy consumption kWh/1,000 hours	13 kWh
Product Data	
Full product code	871150070498600
Order product name	MASTER PL-C 10W/840/2P 1CT/5X10BOX

EAN/UPC – product	8711500704986
Order code	927903884002
SAP numerator – quantity per pack	1
Numerator – packs per outer box	50
SAP material	927903884002
SAP net weight (piece)	45.000 g
ILCOS code	FSQ-10/40/1B-I-G24d=1



Dimensional drawing

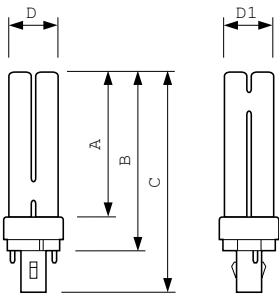

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-C 10W/840/2P 1CT/5X10BOX	27.1 mm	27.1 mm	75.5 mm	95.0 mm	117.4 mm

MASTER PL-C 10W/840/2P 1CT/5X10BOX

Photometric data

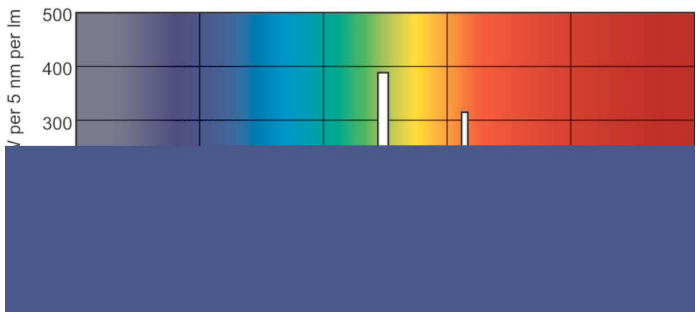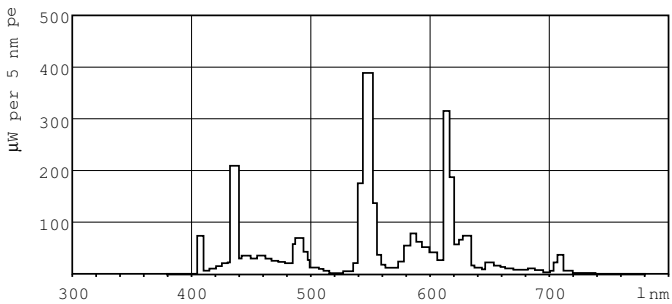

Lightcolour /840

Lightcolour /840

MASTER PL-C 2 Pin

Lifetime



LDLE_PLC2P_0001-Life expectancy diagram

LDLE_PLC2P_0002-Life expectancy diagram



LDLM_PLC2P_0001-Lumen maintenance diagram

