



# MASTER TL5 High Output

## MASTER TL5 HO 24W/840 SLV/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data


General information			
Cap base	G5 [ G5]	Chromaticity coordinate X (nom.)	0.38
Life to 50% failures preheat (nom.)	30000 h	Chromaticity coordinate Y (nom.)	0.38
Features	na [ Not Applicable]	Colour Temperature, horizontal (Nom)	4000 K
System description	High Output (HO)	Lamp Luminous Efficacy EM (Nom)	76 lm/W
LSF preheat 2,000 hours rated	99 %	Colour Rendering Index,horiz (Max)	85
LSF preheat 4,000 hours rated	99 %	Colour Rendering Index,horiz (Min)	80
LSF preheat 6,000 hours rated	99 %	Colour Rendering Index,horiz (Nom)	82
LSF preheat 8,000 hours rated	99 %	LLMF 2000 h Rated	96 %
LSF preheat 16,000 hours rated	97 %	LLMF 4000 h Rated	95 %
LSF preheat 20,000 hours rated	84 %	LLMF 6000 h Rated	94 %
	Sphere	LLMF 8000 h Rated	93 %
		LLMF 12000 h Rated	92 %
		LLMF 16000 h Rated	91 %
		LLMF 20000 h Rated	90 %
Light technical		Operating and electrical	
Colour Code	840 [ CCT of 4,000 K]	Power (Rated) (Nom)	22.7 W
Lamp Luminous Flux 25°C EL (Nom)	1700 lm	Lamp current (nom.)	0.295 A
Lamp Luminous Flux (Nom)	1700 lm		
Colour Designation	Cool White (CW)		
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	87 lm/W		

# MASTER TL5 High Output

Temperature	
Design temperature (nom.)	35 °C
Controls and dimming	
Dimmable	Yes
Mechanical and housing	
Cap-base information	Green Plate
Bulb shape	T5 [ 16 mm (T5)]
Approval and application	
Energy Efficiency Class	G
Mercury (Hg) content (nom.)	1.2 mg
Energy consumption kWh/1,000 hours	23 kWh

	423555
Product data	
Full product code	871150063960855
Order product name	MASTER TL5 HO 24W/840 SLV/40
EAN/UPC – product	8711500639608
Order code	927928084055
SAP numerator – quantity per pack	1
Numerator – packs per outer box	40
SAP material	927928084055
Copy Net Weight (Piece)	52.000 g
ILCOS code	FDH-24/40/1B-L/P-G5-16/550


## Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO 24W/840 SLV/40	17 mm	549.0 mm	556.1 mm	553.7 mm	563.2 mm

## MASTER TL5 HO 24W/840 SLV/40

## Photometric data

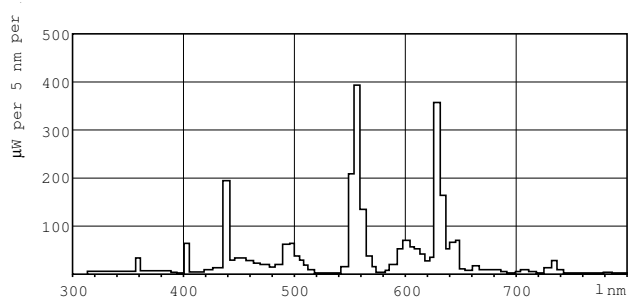

## Lightcolour /840

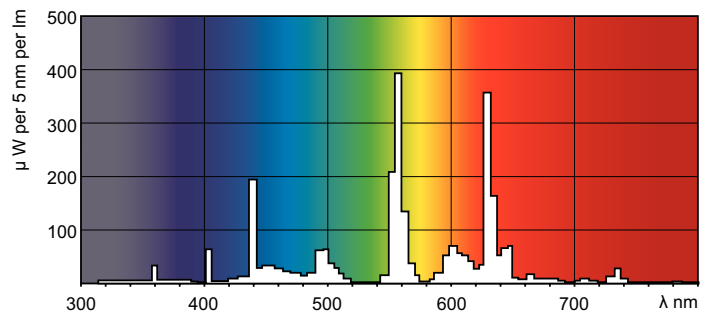

## Lightcolour /840

# MASTER TL5 High Output

## Lifetime



LDLE\_TL5-HO8\_0001-Life expectancy diagram

LDLE\_TL5-HO8\_0002-Life expectancy diagram



LDLM\_TL5-HO8\_0001-Lumen maintenance diagram

