



Essential Smartbright T5 Batten

BN058C LED5/WW L600 GM

Polycarbonate -

The BN058 Batten provides flexibility so customers can choose from three CCT and four different size and lumen packages, based on their specific needs.

Product data

| General Information | | Approval and Application | |
|---|----------------------|-------------------------------------|--------------------------|
| Lamp colour code | 730 warm white | Ingress protection code | IP20 [Finger-protected] |
| Optical cover/lens type | Polycarbonate | Mech. impact protection code | IK02 [0.2 J standard] |
| Control interface | - | | |
| Protection class IEC | Safety class II (II) | Initial Performance (IEC Compliant) | |
| CE mark | - | Initial luminous flux (system flux) | 600 lm |
| Number of products on MCB (16 A type B) | 8 | Luminous flux tolerance | +/-10% |
| Light source engine type | LED | Initial LED luminaire efficacy | 85 lm/W |
| Operating and Electrical | | Lamp colour temperature | 3000 K |
| Input Voltage | 220 to 240 V | Colour Rendering Index | >70 |
| Input frequency | 50 or 60 Hz | Initial input power | 6.5 W |
| Power factor (min.) | 0.5 | Power consumption tolerance | +/-10% |
| Controls and Dimming | | | |
| Dimmable | No | | |
| Mechanical and Housing | | | |
| Housing material | Polycarbonate | | |
| Optical cover/lens material | Polycarbonate | | |

Essential Smartbright T5 Batten

Application Conditions

Ambient temperature range -20 to +40 °C


Product Data

Full product code 871016331400699
Order product name BN058C LED5/WW L600 GM
EAN/UPC – product 8710163314006
Order code 911401709582

SAP numerator – quantity per pack 1
Numerator – packs per outer box 24
SAP material 911401709582
SAP net weight (piece) 0.080 kg



Dimensional drawing

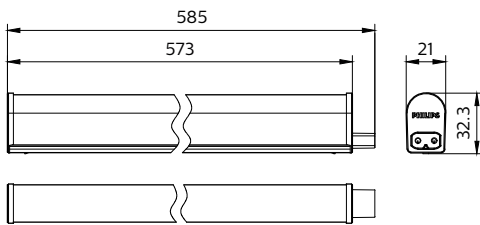

BN058C LED5/WW L600 GM

