



Essential Smartbright T5 Batten

BN058C LED5/NW L600 GM

Polycarbonate -

The BN058 Batten provides flexibility so customers can choose from three CCT and four different size and lumen packages, based on their specific needs.

Product data

General information		Optical cover/lens finish	
Lamp colour code	740 neutral white	Optical cover/lens finish	Opal
Optical cover/lens type	Polycarbonate	Overall length	585 mm
Control interface	-	Overall width	21 mm
Protection class IEC	Safety class II (II)	Overall height	32.3 mm
CE mark	-	Colour	White
Number of products on MCB (16 A type B)	8	Approval and application	
Light source engine type	LED	Ingress protection code	IP20 [Finger-protected]
Operating and electrical		Mech. impact protection code	IK02 [0.2 J standard]
Input Voltage	220 to 240 V	Initial performance (IEC compliant)	
Input frequency	50 or 60 Hz	Initial luminous flux (system flux)	600 lm
Power factor (min.)	0.5	Luminous flux tolerance	+/-10%
Controls and dimming		Initial LED luminaire efficacy	85 lm/W
Dimmable	No	Lamp colour temperature	4000 K
Mechanical and housing		Colour Rendering Index	>70
Housing material	Polycarbonate	Initial input power	6.5 W
Optical cover/lens material	Polycarbonate	Power consumption tolerance	+/-10%

Essential Smartbright T5 Batten

Application conditions

Ambient temperature range -20 to +40 °C


Product data

Full product code 871016331401399
Order product name BN058C LED5/NW L600 GM
EAN/UPC – product 8710163314013
Order code 911401709592

SAP numerator – quantity per pack 1
Numerator – packs per outer box 24
SAP material 911401709592
Net Weight (Piece) 0.080 kg



Dimensional drawing

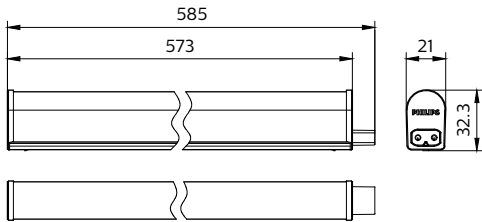

BN058C LED5/NW L600 GM

