



# MASTER LEDcandles – Eye-catching design for chandeliers and other decorative fixtures

## MASTER LEDcandle DiamondSpark

Delivering incandescent-like sparkling light effects, MASTER LEDcandle bulbs are ideal for general and decorative lighting in the hospitality industry, as well as in home environments. The dimmable MASTER LEDcandles drive further efficiencies, while helping to create the desired atmosphere. Mounted in full view in chandeliers, wall scones or modern luminaires, the clear or frosted glass bulbs fit all existing fixtures with an E14 and B15 socket. Drawing upon inputs from chandelier makers and designed to enhance the aesthetic appeal of the chandelier or luminaire, not only when lit but also when not, these lamps come in a classical slender shape with a unique, eye-catching lens design. They produce a beautiful sparkling warm light that delivers huge energy savings and minimizes maintenance cost. The flame-shaped candle lamps comes in a classical slender shape with a unique, eye-catching lens design that perfectly complements modern LED candles.

### Benefits

- Sparkling warm white light
- Up to 80% energy saving
- Lower maintenance costs

# MASTER LEDcandle DiamondSpark

## Features

- Retrofittable with existing E14 and B22 holders
- Lifetime of 20,000 hours
- Unique DiamondSpark lens
- Free of mercury and hazardous materials


## Application

- Hotels, restaurants, bars, cafés
- Chandelier or modern luminaire

## Versions



## Dimensional drawing



Product	D	C
MASTER LEDcandle DT 4-25W E14 B38 CL_AP	38 mm	113 mm

Product	D	C
MASTER LEDlustre DT 4-25W E14 P48 CL	48 mm	95 mm

# MASTER LEDcandle DiamondSpark

## Approval and Application

Energy Consumption kWh/1000 h	4 kWh
Energy Efficiency Label (EEL)	A+

## Controls and Dimming

Dimmable	Yes
----------	-----

## Operating and Electrical

Input Frequency	50 to 60 Hz
Voltage (Nom)	220-240 V
Wattage Equivalent	25 W
Power (Rated) (Nom)	4 W
Starting Time (Nom)	0.5 s

## General Information

Cap-Base	E14
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50,000X

## Light Technical

Colour Code	822-827
Correlated Colour Temperature (Nom)	- K
Colour Rendering Index (Nom)	80
Llmf At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux (Nom)	250 lm

## Mechanical and Housing

Bulb Finish	Clear
-------------	-------


## Temperature

T-Case Maximum (Nom)	85 °C
----------------------	-------

## Mechanical and Housing

Order Code	Full Product Name	Bulb Shape
929001139808	MASTER LEDcandle DT 4-25W E14 B38 CL_AP	B38
929001140002	MASTER LEDlustre DT 4-25W E14 P48 CL	P48

# MASTER LEDcandle DiamondSpark

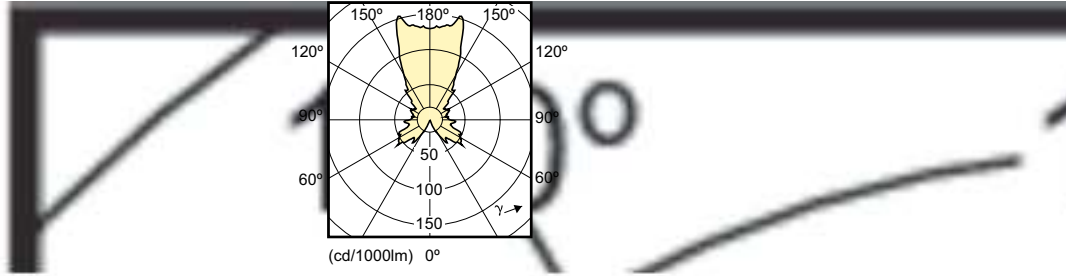

# MASTER LEDcandle DiamondSpark

