



HPL-N

HPL-N 125W/542 E27 1CT/24

Standard High Pressure Mercury lamp

Product data

General Information	
Cap base	E27 [E27]
Burning Position	UNIVERSAL [Any/Universal]
Life to 5% failures (nom.)	6000 h
Life to 20% failures (nom.)	12000 h
Life to 50% failures (nom.)	20000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	98 %
LSF 6000 h Rated	95 %
LSF 8000 h Rated	92 %
LSF 12000 h Rated	80 %
LSF 16000 h Rated	68 %
LSF 20000 h Rated	50 %
Light Technical	
Colour Code	542 [CCT of 4,200 K]
Lamp Luminous Flux (Nom)	6200 lm
Colour Designation	Cool White (CW)
Lumen maintenance 2,000 hours (min.)	82 %
Lumen maintenance 2,000 hours (nom.)	92 %
Lumen maintenance 5,000 hours (min.)	80 %
Lumen maintenance 5,000 hours (nom.)	90 %
Chromaticity coordinate X (nom.)	374
Chromaticity coordinate Y (nom.)	373
Colour Temperature, horizontal (Nom)	4100 K
Lamp Luminous Efficacy EM (Nom)	50 lm/W

Colour Rendering Index,horiz (Nom)	46
LLMF 2000 h Rated	92 %
LLMF 4000 h Rated	91 %
LLMF 6000 h Rated	89 %
LLMF 8000 h Rated	88 %
LLMF 12000 h Rated	85 %
LLMF 16000 h Rated	80 %
LLMF 20000 h Rated	76 %

Operating and Electrical

Power (Rated) (Nom)	125.0 W
Lamp current (EM) (nom.)	1.15 A
Ignition supply voltage (max.)	170 V
Voltage (Max)	135 V
Voltage (Min)	115 V
Voltage (Nom)	125 V

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb finish	Coated glass
Bulb material	Soft Glass

Approval and Application

Energy efficiency label (EEL)	B
-------------------------------	---

HPL-N

Mercury (Hg) content (nom.)	19.0 mg
Energy Consumption kWh/1000 h	137 kWh

Luminaire Design Requirements


Bulb temperature (max.)	350 °C
Cap base temperature (max.)	200 °C

Product Data

Full product code	69205902779500
Order product name	HPL-N 125W/542 E27 1CT/24

EAN/UPC – product	6920590277795
Order code	928052007391
Numerator – quantity per pack	1
Numerator – packs per outer box	24
Material no. (12NC)	928052007391
Net weight (piece)	63.000 g
ILCOS Code	QE-125/41/3-H-E27


Dimensional drawing



HPL N 125W E27 SG

Product	D (max)	C (max)
HPL-N 125W/542 E27 1CT/24	76 mm	173 mm



Photometric data

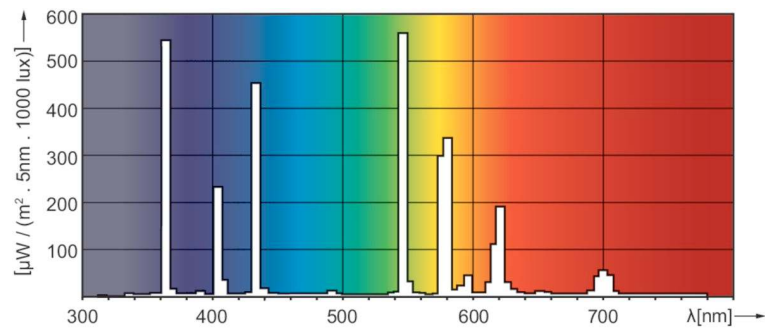

LDPO_HPL_N-Spectral power distribution Colour

HPL-N

Lifetime

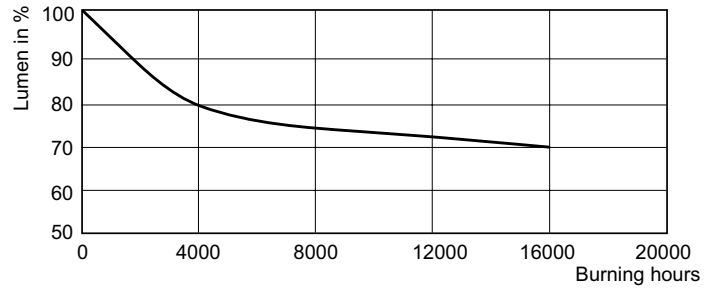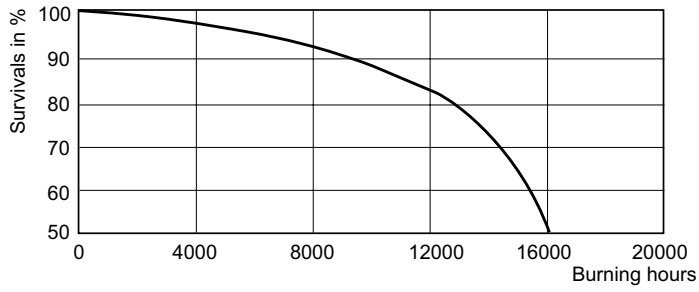

LDLE_HPL_0001-Life expectancy diagram

LDLM_HPL_0001-Lumen maintenance diagram

